



SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

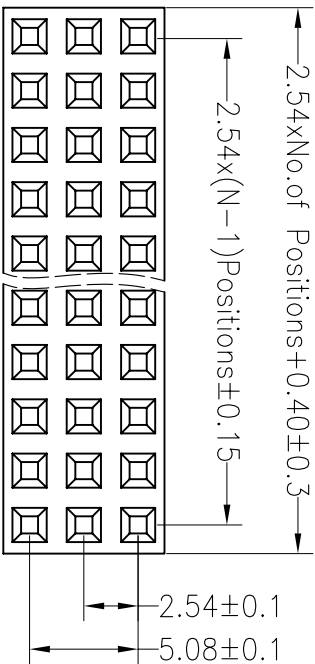



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

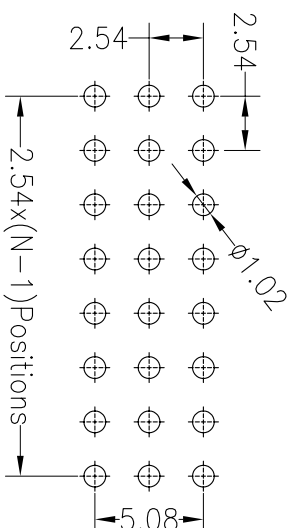

Ordering Information

2271 03 XX X N XX S Y X 01

No. of Pins Per Row: 3*40
 Insulator Material Option:
 A=BK-PBT
 B=BK-PA66
 C=BK-PA6T
 D=BK-PA46
 F=BK-LCP
 Contact Plating:
 G0: Gold Flash
 G2: 5U" Gold
 G3: 10U" Gold
 G4: 15U" Gold
 G5: 30U" Gold
 S0: Gold Flash/Tin
 SN: Tin
 Packing:
 0=PE Bag
 A=Tray
 T=Tube
 P=Tube+Cap

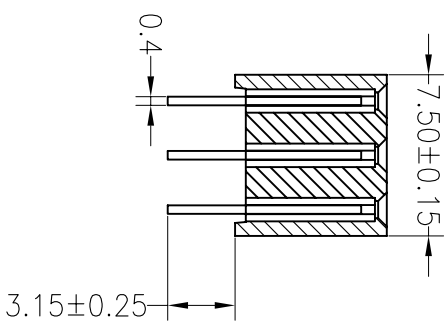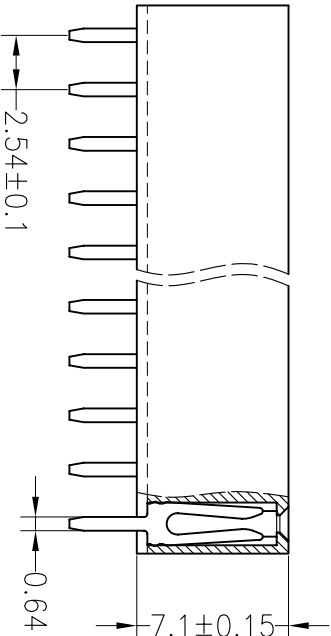

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	Y.Y	U.Sheng	UNIT	mm	1/1	A4	227103XXXXXXSYX01	
X.XX	±0.20	CHECK		SIZE		SHEET	1/1	2.54PF H7.1mm 3xNpin 180° DIP	
X.XXX	±0.10	APPROVE		PROJ.					
Angle	±3°								
DIM	TOL								

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2013.05.26	NEW DRAWING	
1			