


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

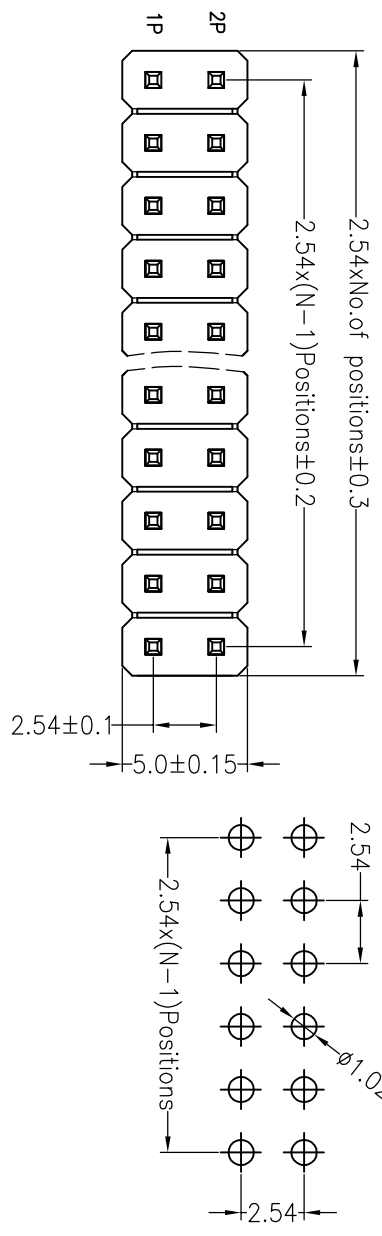

Ordering Information

1225 12 XX X N XX S XXX X 01

- No. of Pins Per Row: 1x40, 2x40, 3x40, 1--40, 2--80, 3--120
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, E=BK-PA9T, F=BK-LCP
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:10U" Gold, G4:15U" Gold, G5:30U" Gold, S0:Gold Flash/Tin, SN:Tin
- Pin Length: 0=BE Bag, A=Troy, T=Tube, P=Tube+Cap
- Packing: 0=BE Bag, A=Troy, T=Tube, P=Tube+Cap

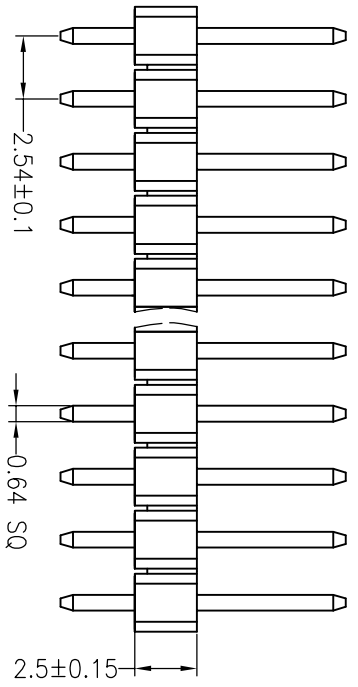

Dimension antitheses list				
ITEM	PA	PC	L	
Standard	6.00	3.00	11.5	
Alternate				

OPERATION		DRAW		SCALE		FIT		TITLE:	
XX	±0.30	YYuSheng	12.03.28	UNIT	mm	A4	1/1	PART NO.	122512XXXXXXSXXXX01
X:XX	±0.20	CHECK		SIZE		SHEET	1/1	PROJ.	
X:XXX	±0.10	APPROVE		ANGLE	±3°	TOL			2.54PH H2.5mm Dual Row 180°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM					
A0	2012.03.28	NEW DRAWING							
1									

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892