





SPECIFICATIONS

Rated Current:1.5AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:400V AC/DC
 Insulation Resistance:800MΩ Min
 Operation Temperature:-40°C to +105°C

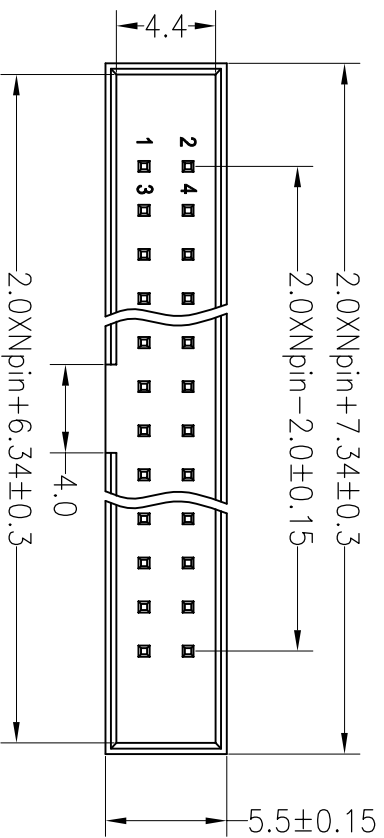

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)


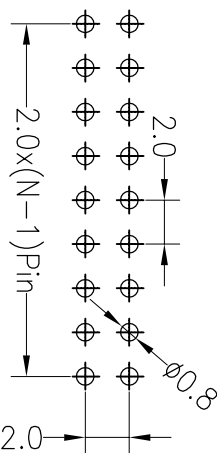


Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3220 XX S XX X B D01 X 01

No. of Pins 6---68P
 Contact Plating G0:Gold Flash
 Option G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 S0:Gold Flash/Tin
 SN:Tin
 Insulator Material Option
 A=BK-PBT
 C=BK-PA6T
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Packing O=PE Bag
 A=Troy
 T=Tube
 P=Tube+Cap

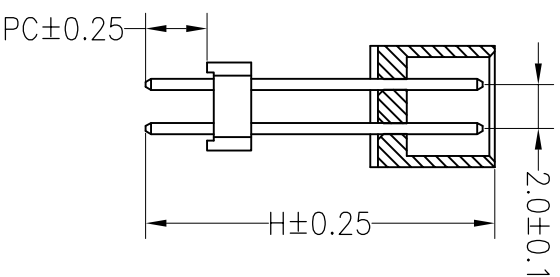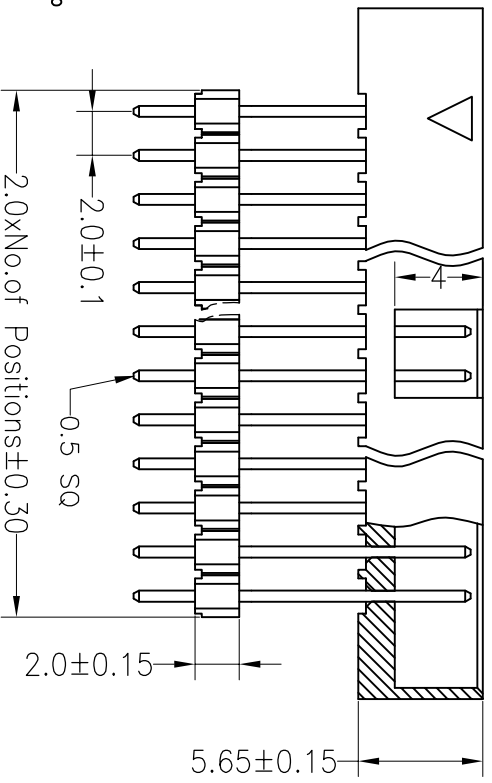

Dimension antitheses list				
ITEM	H	PC	L	
Alternate	22.20	2.80	22.00	

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892

PART NO. 3220-XXSXXBD01X01

TITLE: 2.0Box Header Npin H5.65+H2.0 180°

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	APPROVE
A0	2017.10.26	NEW DRAWING		X:XXX	±0.10	CHECK
1				Angle	±3°	

OPERATION	DRAW	JINCHENGIN	17.10.26	SCALE	FIT
X.X				UNIT	mm
X.XX				SIZE	A4
X:XXX				SHEET	1/1
				PROJ.	