


SPECIFICATIONS

Rated(额定参数): 400V,15A
 Dielectric strength(抗电强度): AC2000V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Screw Torque(扭矩): 0.5Nm (4.5lb.in)
 Wire Range(线径):1.4~2.2AWG
 Strip length(剥线长度):6~7mm
 Temp. range(操作温度):-40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)
 Contact(端子): Brass, Ni plating(黄铜镀镍)
 Screw (螺丝): M3.0, Steel, Zinc plating(钢,镀锌)

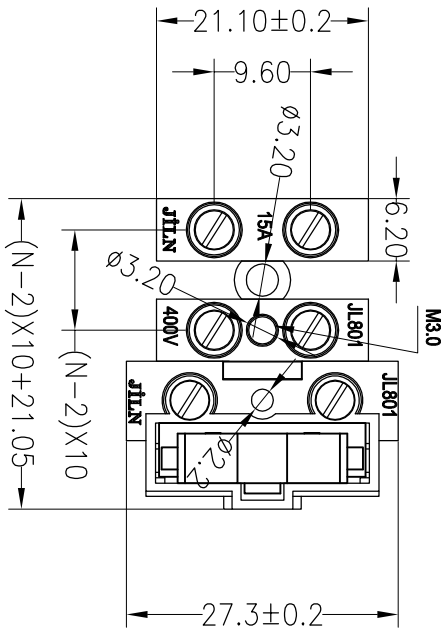

Ordering Information



JL801 - 100 XX E X 1

Pitch
100=10.0PH

No.of pins
1P,2P,3P
4P,5P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Packing
O=Pe bog
T=Tube
A=Tray

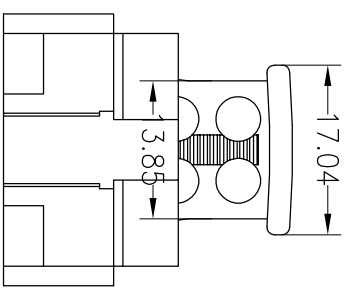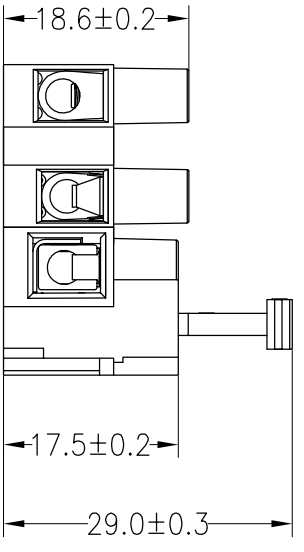

		OPERATION		DRAW		SCALE		FIT		PART NO.	
		X.X		Yiyusheng		UNIT		mm		JL801-100XXEX1	
		X.XX		18.12.03		SIZE		A4		SHENZHEN JINLING ELECTRONIC CO.,LTD	
		X:XXX		CHECK		SHEET		1/1		Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
A0		NEW DRAWING		APPROVE		PROU.		1/1		SHENZHEN JINLING ELECTRONIC CO.,LTD	
REV		DATE		CHANGE		DIM		TOL		TITLE:	
1		2018.12.03		4		5		6		10.0mm Feed THROUGH Terminal Blocks	

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD